

# XS8C1A1MAL2

Inductive proximity sensors XS, inductive sensor XS8 40x40x15, PBT, Sn25mm, 24...240VAC/DC, cable 2 m



## Main

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| Range of product                   | Telemecanique Inductive proximity sensors XS       |
| Series name                        | General purpose                                    |
| Sensor type                        | Inductive proximity sensor                         |
| Device application                 | -                                                  |
| Sensor name                        | XS8                                                |
| Sensor design                      | Flat form 40 x 40 x 15                             |
| Size                               | 15 mm                                              |
| Body type                          | Fixed                                              |
| Detector flush mounting acceptance | Non flush mountable                                |
| Material                           | Plastic                                            |
| Enclosure material                 | PBT                                                |
| Type of output signal              | Discrete                                           |
| Wiring technique                   | 2-wire                                             |
| [Sn] nominal sensing distance      | 15 Mm flush mountable<br>25 mm non flush mountable |
| Discrete output function           | 1 NO                                               |
| Output circuit type                | AC/DC                                              |
| Electrical connection              | Cable                                              |
| Cable length                       | 2 m                                                |
| [Us] rated supply voltage          | 24...240 V AC/DC 50/60 Hz                          |
| Switching capacity in mA           | 5...200 mA DC<br>5...300 mA AC                     |
| IP degree of protection            | IP68 double insulation conforming to IEC 60529     |

## Complementary

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| Detection face           | Frontal                                                    |
| Front material           | PBT                                                        |
| Fine adjustment zone     | 8...15 Mm flush mountable<br>8...25 mm non flush mountable |
| Differential travel      | 1...15% of Sr                                              |
| Cable composition        | 2 x 0.34 mm <sup>2</sup>                                   |
| Wire insulation material | PVC                                                        |
| Supply voltage limits    | 20...264 V AC/DC                                           |
| Maximum residual current | 1.5 mA open state                                          |
| Switching frequency      | <= 1000 Hz                                                 |
| Maximum voltage drop     | <5.5 V (closed)                                            |
| Current consumption      | <= 10 mA no-load                                           |
| Maximum delay first up   | 10 ms                                                      |
| Maximum delay response   | 0.3 ms                                                     |
| Maximum delay recovery   | 0.8 ms                                                     |
| Marking                  | CE                                                         |
| Depth                    | 15 mm                                                      |
| Height                   | 40 mm                                                      |
| Width                    | 40 mm                                                      |
| Net weight               | 0.09 kg                                                    |

## Environment

|                                       |                                                                         |
|---------------------------------------|-------------------------------------------------------------------------|
| Product certifications                | CSA[RETURN]UL[RETURN]Ecolab[RETURN]CCC                                  |
| Ambient air temperature for operation | -25...70 °C                                                             |
| Ambient air temperature for storage   | -40...85 °C                                                             |
| Vibration resistance                  | 25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                      | 50 gn for 11 ms conforming to IEC 60068-2-27                            |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 4.200 cm  |
| Package 1 Width              | 9.700 cm  |
| Package 1 Length             | 13.200 cm |
| Package 1 Weight             | 126.000 g |
| Unit Type of Package 2       | S03       |
| Number of Units in Package 2 | 44        |
| Package 2 Height             | 30.000 cm |
| Package 2 Width              | 30.000 cm |
| Package 2 Length             | 40.000 cm |
| Package 2 Weight             | 6.014 kg  |


## Offer Sustainability

|                                            |                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status                   | Green Premium product                                                                                                                                                                                                                                                                                                                                                             |
| Circularity Profile                        | No need of specific recycling operations                                                                                                                                                                                                                                                                                                                                          |
| California proposition 65                  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| For all Reach Rohs enquiries contact us at | <a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>                                                                                                                                                                                                                                                                                                    |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

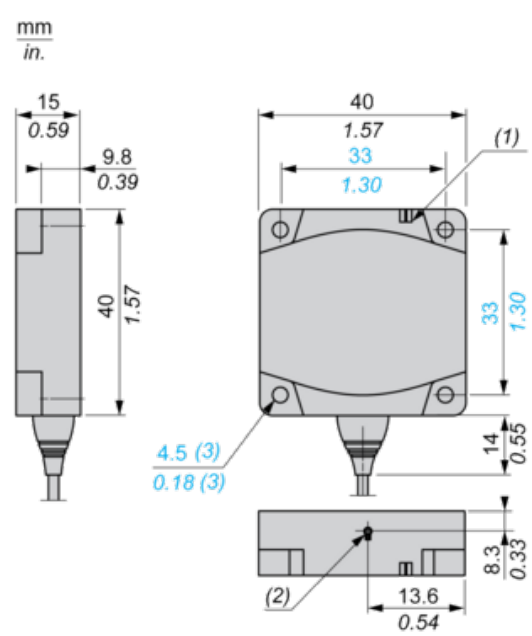


- (1) LED
- (2) Teach mode button
- (3) For CHC type screws


Setting-up

Minimum Mounting Distances (mm)


Side by Side

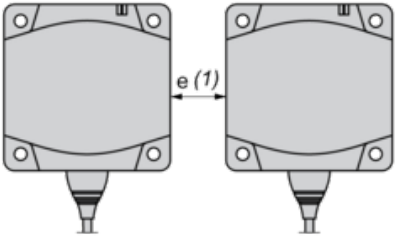

Face to Face



Facing a Metal Object




|                   | e (1) | e (2) | e (3) |
|-------------------|-------|-------|-------|
| Flush mounted     | 60    | 120   | 15    |
| Not flush mounted | 125   | 250   |       |

---

## Wiring Schemes

---

### 2-Wire NO Output



BU : Blue

BN : Brown